




Hinge and door removal

Release the lever under the hinge arm to remove


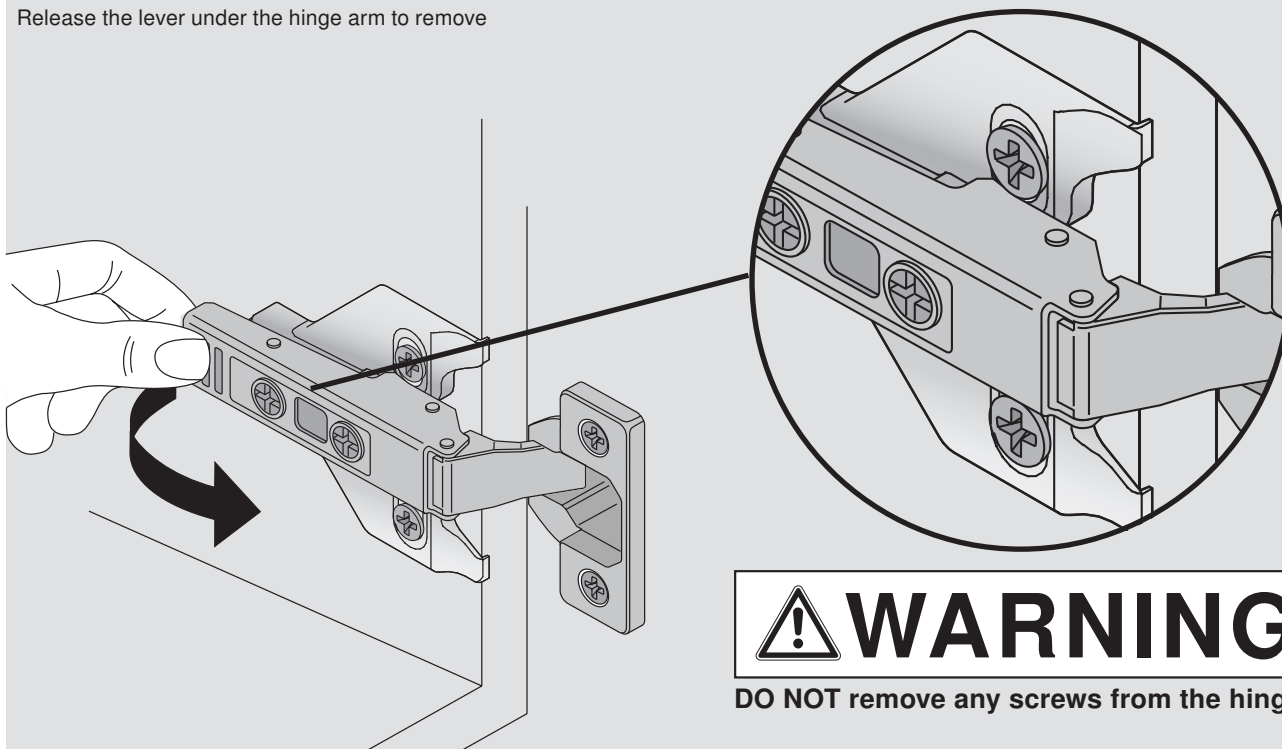


Installing new plate

Old design (175L6600.22)
(off center mount)

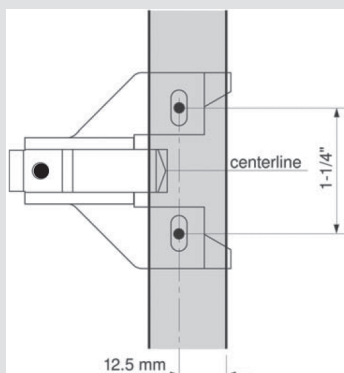

NEW design (175H6000)
(center mount)

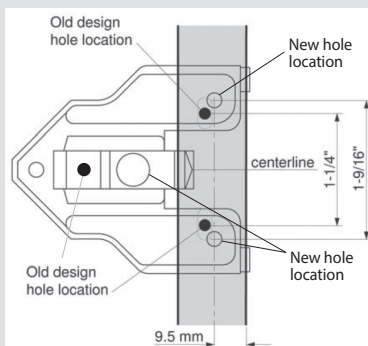

NOTE: Predrill NEW screw holes before you attach the mounting plate

NOTE: Use original screws if available, if not, please use a #7 3/4" phillips wood screw

Reattaching door

To install, place the hinge on the mounting plate and push the back of the hinge arm down with finger pressure.

The "click" sound confirms a secure attachment.

